


# Installation Top-Fixation **without** sound insulation

Mounting Instruction 220345  
for Item A10279




## Assembly instructions for flow reducer

The flush flow reducer should only be used if the flush pressure is too high and over-splashing occurs during flushing. The throttle is simply inserted into the inlet pipe to the WC. Depending on the position, this results in a reduction of 30-40%.

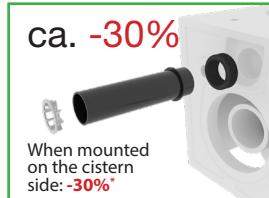


\* Figures are approx. values

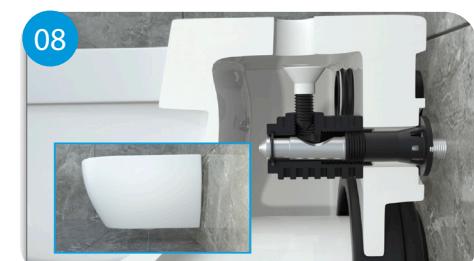


# Installation Top-Fixation with sound insulation

Mounting Instruction 220345  
for Item A10279

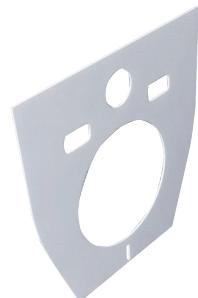

## Assembly instructions for flow reducer

The flush flow reducer should only be used if the flush pressure is too high and over-splashing occurs during flushing. The throttle is simply inserted into the inlet pipe to the WC. Depending on the position, this results in a reduction of 30-40%.

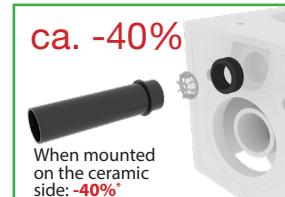






\* Figures are approx. values













# A10119

## TOP Mounted Solid Pro

### 1 - POSITION A

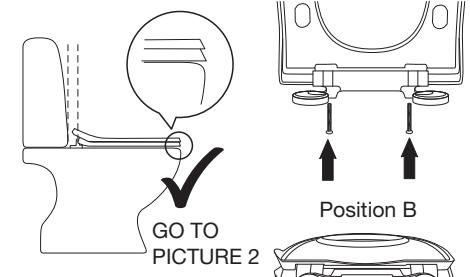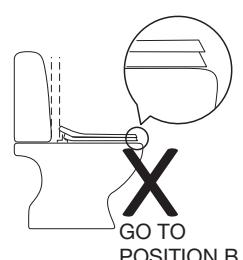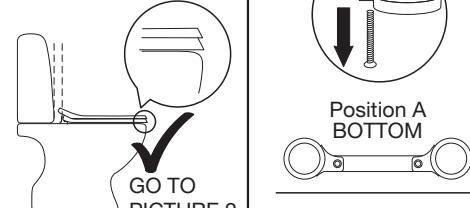

### 1 - POSITION B

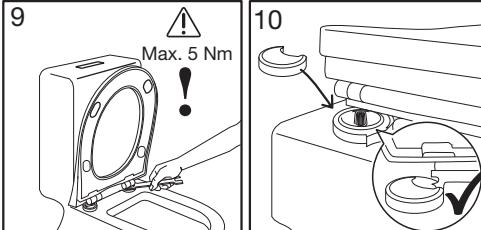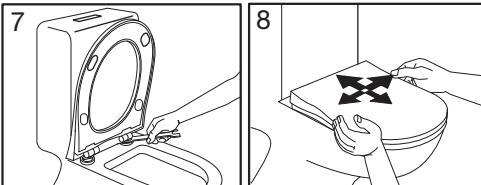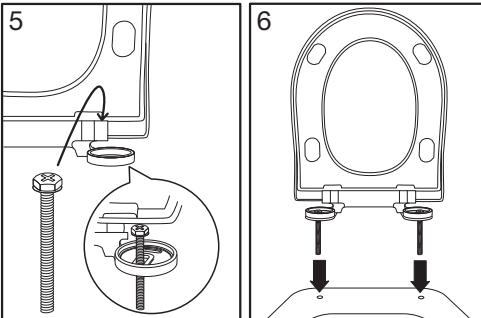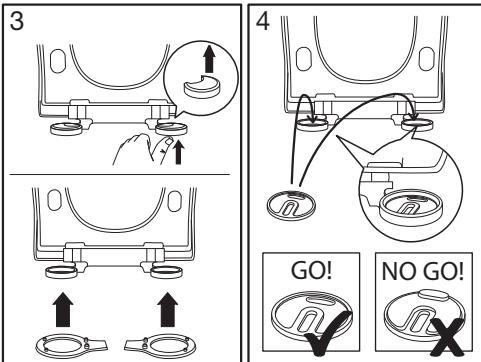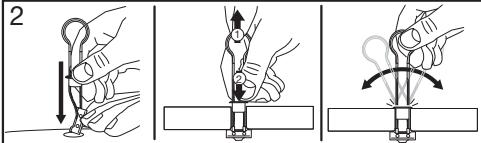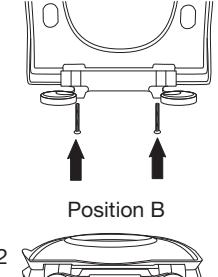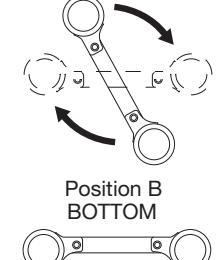

Rev C /14-03-2017



5 708590 345550