




## Pressalit Solid Pro Norden without cover 1119

Toilet seat with soft close and antibacterial effect, without cover,  
incl. Solid Pro hinge

<b>Features</b>	Soft close
<b>Item number</b>	1119011-DG2925 VVS:614972011 NRF:6190379 RSK:7824018 EAN:5708590386959 HMI: 139830
	A design-conscious choice focusing on durability and robustness. With soft close as well as an antibacterial effect and strong fittings that ensure optimum stability - even during sideways transfer
<b>Colour</b>	White
<b>Description</b>	PRESSALIT toilet seat without cover, model "Solid Pro Norden", art.no. 1119 made of colour ingrained duroplast, incl. DG2 universal hinge. - built-in soft close function - centre distance: 145-210 mm - load - ring seat 240 kg - 10 year guarantee
	
<b>Design type</b>	Sandwich
<b>Designer</b>	Pressalit
<b>Design year</b>	2022

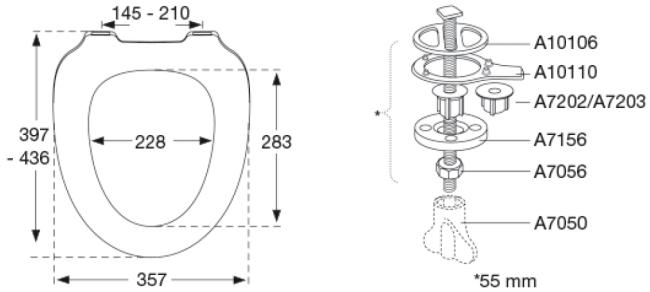

## Pressalit Solid Pro Norden without cover 1119

Toilet seat with soft close and antibacterial effect, without cover,  
incl. Solid Pro hinge

<b>Materials</b>	<p><b>TOILET SEAT:</b> The material is colour ingrained duroplast (UF A 10 = urea formaldehyde) that contains no environmentally hazardous substances. UF plastic comprises approx. 70% urea formaldehyde resin, 30% cellulose, as well as 5% minerals, pigments, lubricants and moisture content. Free formaldehyde is released during the production process. Pressalit toilet seats have been measured after curing (&lt; 0.01 mg/m<sup>3</sup>) to emit significantly below the permitted EU limit of 0.08 mg/m<sup>3</sup>.</p> <p><b>ANTIBACTERIAL:</b> This toilet seat features an antibacterial additive with biocidal silver phosphate glass, which helps prevent bacterial growth.</p> <p><b>BUFFERS:</b> EVA (copolymer made of ethylene and vinyl acetate).</p> <p><b>DAMPER KIT</b> (only relevant for toilet seats with soft close): Hydraulic damper with stainless steel damper casing and thermoplastic parts.</p> <p><b>MOUNT/HINGES:</b> Stainless steel. Thermoplastic semi-crystalline polyamides with partially aromatic content. Aluminium profile EN AW-6063-TS.</p>
<b>Product capacity</b>	Load - ring seat 240 kg
<b>Weight</b>	1,155 kg
<b>Carton size</b>	457x389x68 mm
<b>Gross weight</b>	1,605 kg
<b>Crate size</b>	469x401x348mm
<b>Weight per crate</b>	8,025 kg
<b>Qty per crate</b>	5
<b>Crates per pallet</b>	12
<b>Qty per pallet</b>	60
<b>Cleaning</b>	Use a mild soap solution to clean the seat. Please take care that the seat and hinges are not left damp. Dry off any residual water or cleaning agent with a soft cloth. Avoid contact of the seat and hinges with abrasive, corrosive or chlorine-based cleaners, as these may cause damage or lead to flash rust. Therefore, when cleaning the bowl, make sure that the seat and cover are kept in an upright position until all cleaning agent has been flushed away.



# PRESSALIT®

---

**Pressalit Solid Pro Norden without cover 1119**

**Toilet seat with soft close and antibacterial effect, without cover,  
incl. Solid Pro hinge**

---

**Warranty**

Your Pressalit toilet seat is subject to a 10-year product warranty against presentation of receipt. You should contact the dealer or store where you purchased the seat in the event of a complaint. In the event of complaints about defective materials and/or manufacturing defects and/or functional limitations ascertained within a 10-year period, following proper use and cleaning of the toilet seat (we reserve the right to examine the toilet seat at our factory), Pressalit will deliver spare parts or replace the toilet seat by an identical or similar model. If the color is no longer available, Pressalit reserves its right to replace the toilet seat by a similar model in the color white. Upon replacement or delivery of a spare part, the warranty period will not be extended nor renewed. If replacement is not possible, Pressalit may instead refund the purchase price.

Subject to changes in the product range, technical changes and printing errors.

---

[pressalit.com](http://pressalit.com)

---