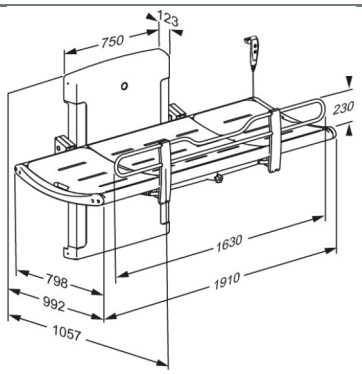
Product	SCT 3500 shower change table, electrically height adjustable and with Pressure Sensitive Stop
Item number	R8586318301
	EAN:5708590398303
Colour	Graphite grey (RAL 7024)
Product description	Pressalit offers a variety of mobile and wall-hung, height-adjustable and fixed height shower and changing tables of high quality. They are designed to provide a stable platform for showering and changing adults and children with reduced mobility. These tables can be used in schools, institutions, hospitals and private homes and are all designed to be durable, comfortable and easy to clean. The design and flexibility of the tables ensures optimal working conditions for the carer as well as a high level of comfort and safety for the user. SCT 3500 shower change table, powered, height adjustable 700 mm; from 300 mm - 1000 mm, with wired hand control and Pressure Sensitive Stop that responds to unintended obstacles during lowering. Foldable. Incl. safety rail, flexible hose (Ø32 mm) and water collection tray with integrated outlet. Surface length 1800 mm, outer measurements 1057 mm x 1910 mm. Excl. mounting kit.
Adjustability	Height adjustable
Adjustment height	700 mm
Product capacity	Maximum user weight (MUM): 227 kg. Safe working load (SWL): 237 kg. When the table is loaded with 227 kg, each mounting bolt supports 29,5 kg *This product has been tested statically with a load of 592,5 kg as the IEC 60601-1 standard requires testing with safety factor 2.5.*
Speed upwards	Speed up mm: 18 mm/s Speed down mm: 22 mm/s
Noise level	48 dB



Product	SCT 3500 shower change table, electrically height adjustable and with Pressure Sensitive Stop
Item number	R8586318301
Materials	Powder-lacquered stainless steel, aluminium and plastics (PVC, Polystyrene). Pads in polyurethane foam, are tested according to the DIN EN 1021-1 standard (flame resistance).
Ergonomy	• The ergonomically designed safety rails have a practical lower central section, which provides better access and work environment for the carer while transferring, showering, drying, changing and dressing the user. • One hand operated safety rails allows the carer to maintain eye contact as well as physical contact with the user during the whole process. • Easy to clean, smooth contact surfaces which do not collect dirt and bacteria.
Features	• Unique Pressure Sensitive Stop that responds to unintended obstacles during lowering. • A water collection tray with integrated water outlet prevents water from splashing on carers or the floor. The flexible hose (Ø32 mm) attached to the center mounted outlet of the water collection tray, can be connected to either an outlet in the floor or on the wall. • The slightly curved shape makes the table comfortable and safe to lie on. • Adjustable neck support which can be moved to either end of the 1800 mm shower and changing tables. • The integrated gas cylinders enable the table to be folded out of the way when not in use to maximize floor space. • The powered shower change table is supplied with a wired hand control. The red buttons clearly indicate "up" and "down". • The wired hand control comes with a practical holder for placement on the wall.
Mains connection (V)	230
Actuator (motor)	LA40 HP Careline (Linak) 4000 N, IPX6, rachet spline
Control box	CO61 OpenBus Careline (Linak), IPX6
Wired remote control	HB31 OpenBus for CO61 (Linak), IPX6
Power consumption (maximum load)	Power consumption by maximum load, watt: 446 W Power consumption by standby: 0,6 W











PRESSALIT®






Product	SCT 3500 shower change table, electrically height adjustable and with Pressure Sensitive Stop
Item number	R8586318301
Warranty	A 3-year warranty is provided for your product from the date of purchase. The warranty covers material or manufacturing defects. The warranty does not cover defects or damage resulting from normal wear and tear, improper operation, misuse, inadequate maintenance, use of unsuitable cleaning agents, incorrect installation, or disassembly. In the event of a claim, you must always contact the dealer or store where you purchased the product. The warranty is conditional upon proof of purchase of the product. Pressalit will supply a spare part or replace the product with the same or a similar model. The warranty period is neither extended nor renewed when replacement products or spare parts are supplied. If replacement is not possible, Pressalit is entitled instead to refund the purchase price. NOTICE If the product is placed in an atmosphere heavy in salt or chlorine, the warranty will be reduced from the normal 3 years to 1 year. Salt and chlorine have a corrosive effect on the products components and will cause a decrease in the life expectancy of the product. These warranty terms apply in addition to the consumer's statutory rights and do not limit or exclude them.

Product	SCT 3500 shower change table, electrically height adjustable and with Pressure Sensitive Stop
Item number	R8586318301
Cleaning	The product is to be cleaned with hot water or a mild soapy cleaning agent. Do not use chlorine based, corrosive or abrasive cleaners as it may result in the surface being damaged. The following cleaning agents have been tested by Pressalit and may be used, as long as they are diluted according to the instructions on the container. DISINFECTANTS: Clinimax Difficil-S Erisan OXY+ Sprit (husholdningssprit) Suma Bac D10 Virkon Rodalon Desinfektionsspray Lysoformin Spezial CaviCide Sufanios Premium Tvättsprit 70% Accel PREVention Wipes Lingettes Universal Wipes (Clinell) Sporidical Wipes (Clinell) CHLOR-CLEAN Tablets (chemform) WipeClean Ethanol Disinfection 80% (PLUM) Wetwipe Ethanol Disinfection 70% (wetwipe) OxiGenesis from ENVIROX NON-DISINFECTANTS: Suma Star free D1 Taski 100 Taski 200 Milizid Citro The product must be wiped down with a soft rag wrung out in clear water immediately after cleaning, as some materials may otherwise be discolored and stained, and the surface coating may deteriorate. DECALCIFICATION OF ALUMINUM PARTS: Pressalit recommends that chalky deposits be removed from wall tracks and other aluminum parts using a solution of three parts 30% acetic acid to seven parts tap water. When the aluminum parts have been washed down with this solution, the parts must be wiped over with a damp cloth wrung out in clear water.
WEEE	Please enquire of your local Pressalit subsidiary or distributor (in countries where there is no subsidiary) that will arrange for recycling of electronic waste in accordance with the WEEE directive.

Product	SCT 3500 shower change table, electrically height adjustable and with Pressure Sensitive Stop
Item number	R8586318301

Installation in different wall types

	**Concrete >B25** V8608 - Mounting kit, 6 coach screws Ø10 x 70 - plugs SX12. To be ordered separately.	
	**Solid Brick >= Mz12** V8608 - Mounting kit, 6 coach screws Ø10 x 70 - plugs SX12. To be ordered separately.	
	**Solid Sand Lime Brick >= Hlz12** V8608 - Mounting kit, 6 coach screws Ø10 x 70 - plugs SX12. To be ordered separately.	
	**Aerated Concrete P4** V8658 - Mounting kit, 6 coach screws Ø10 x 70 - plugs GB14. To be ordered separately.	
	**Drywall (2 x 12,5 mm) water-resistant, re-enforced with wood** V8608 - Mounting kit, 6 coach screws Ø10 x 70 - plugs SX12. NB! Plugs are not needed. To be ordered separately.	

Product	SCT 3500 shower change table, electrically height adjustable and with Pressure Sensitive Stop
Item number	R8586318301
	**Drywall (2 x 12,5 mm) water-resistant, re-enforced with 22 mm plywood** Wall fasteners (6 pcs) must be bought separately, for drywall it is possible to use e.g. fischer KD8 toggles or similar. 
	**Drywall (2 x 12,5 mm) water-resistant, re-enforced with steel plates (2 mm)** Wall fasteners (6 pcs) must be bought separately, for drywall it is possible to use e.g. fischer KD8 toggles or similar. 
	**Drywall (2 x 12,5 mm) water-resistant** Mounting in this wall type is not recommended - risk of fatal injury to persons and walls. 

It is the responsibility of the installer to ensure that suitable wall fasteners are used.

Pressalit A/S
Pressalitvej 1
DK-8680 Ry
Tel.: +45 8788 8788
Fax: +45 8788 8789
E-mail: pressalit@pressalit.com