
PRESSALIT®

Product	Mixer tap with long rotatable spout and loop-shaped operating lever
Item number	RT624
	VVS:701399104 RSK:8064033 EAN:5708590382470 HMI: 61272

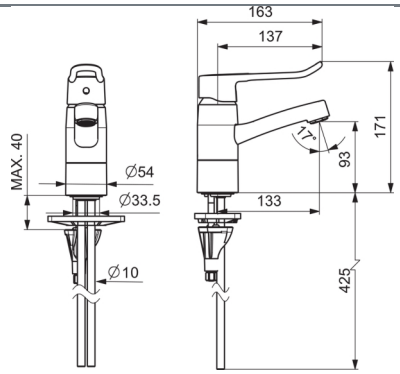

Product description	Mixer tap with long rotatable spout and loop-shaped operating lever. 175 mm flex hose. Hot and cold symbols. With scalding protection and water-saving Eco-effect. Without drain fitting. Mixer tap with long rotatable spout and loop-shaped operating lever. 175 mm flex hose. Hot and cold symbols. With scalding protection and water-saving Eco-effect. Without drain fitting. Material: Chronium-plated brass
Materials	Chronium-plated brass
Ergonomy	The loop-shaped operating lever is specifically suitable for users who find it difficult to use common levers. The long, rotatable spout makes it easier for a seated user to reach the water, as well as the spout can be swung to one side.
Features	Long rotatable spout. The water-saving Eco-effect gives the choise between a moderate flow and a full flow. The preset moderate flow can be adjusted.
Warranty	A 5-year warranty is provided for your product from the date of purchase. The warranty covers material or manufacturing defects. The warranty does not cover defects or damage resulting from normal wear and tear, improper operation, misuse, inadequate maintenance, use of unsuitable cleaning agents, incorrect installation, or disassembly. In the event of a claim, you must always contact the dealer or store where you purchased the product. The warranty is conditional upon proof of purchase of the product. Pressalit will supply a spare part or replace the product with the same or a similar model. The warranty period is neither extended nor renewed when replacement products or spare parts are supplied. If replacement is not possible, Pressalit is entitled instead to refund the purchase price. These warranty terms apply in addition to the consumer's statutory rights and do not limit or exclude them.

Product	Mixer tap with long rotatable spout and loop-shaped operating lever
Item number	RT624
Cleaning	The product is to be cleaned with hot water or a mild soapy cleaning agent. Do not use chlorine based or corrosive cleaners as it may result in the surface being damaged.

Pressalit A/S
Pressalitvej 1
DK-8680 Ry
Tel.: +45 8788 8788
Fax: +45 8788 8789
E-mail: pressalit@pressalit.com