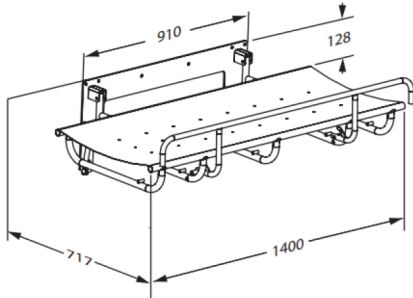




PRESSALIT®

Product Item number	SCT 1000 shower change table, fixed height R8406000
Colour	VVS: 777545340 EAN: 5708590294810 HMI: 88216 NBS: N13:40,375 FDA: INT/D124320 White
Product description	 Pressalit offers a variety of mobile and wall-hung, height-adjustable and fixed height shower and changing tables of high quality. They are designed to provide a stable platform for showering and changing adults and children with reduced mobility. These tables can be used in schools, institutions, hospitals and private homes and are all designed to be durable, comfortable and easy to clean. The design and flexibility of the tables ensures optimal working conditions for the carer as well as a high level of comfort and safety for the user. SCT 1000 shower change table, fixed height. Foldable. Incl. safety rail. Outer measurements 747 mm x 1400 mm. Excl. mounting kit.
Adjustability Product capacity	Fixed mounting Maximum user weight (MUM): 150 kg. Safe working load (SWL): 150 kg. When the table is loaded with 150 kg, each mounting bolt supports 46 kg. <i>This product has been tested statically with a load of 225 kg as the ISO 17966 standard requires testing with safety factor 1.5.</i>
Materials Ergonomy Features	The table is made from practical and durable PVC canvas which is phthalate free. The frame is powder-coated stainless steel. Foldable. The integrated gas cylinders enable the table to be folded out of the way when not in use to maximise floor space in front of the unit. Splash curtain (optional) for the nursing bench protects the carer against splashing.











PRESSALIT®

Product	SCT 1000 shower change table, fixed height
Item number	R8406000
Warranty	Pressalit makes a commitment to remedy material and manufacturing defects for a period of three years from the invoicing date. NOTICE If the product is placed in an atmosphere heavy in salt or chloride, the warranty will be reduced from the normal 3 years to 1 year. Salt and chloride have a corrosive effect on the products components and will cause a decrease in the life expectancy of the product.
Cleaning	SCT 1000 & 2000 The product is to be cleaned with hot water or a mild soapy cleaning agent. Do not use chlorine based, corrosive or abrasive cleaners as it may result in the surface being damaged. The following cleaning agents have been tested by Pressalit and may be used, as long as they are diluted according to the instructions on the container. DISINFECTANTS: Clinimax Difficil-S Erisan OXY+ Sprit (husholdningssprit) Suma Bac D10 Virkon Rodalon Desinfektionsspray Lysoformin Spezial CaviCide Sufanios Premium Tvättsprit 70% Accel PREvention Wipes Lingettes OxiGenesis from ENVIROX NON-DISINFECTANTS: Suma Star free D1 Taski 100 Taski 200 Milizid Citro The product must be wiped down with a soft rag wrung out in clear water immediately after cleaning, as some materials may otherwise be discolored and stained, and the surface coating may deteriorate.



Product	SCT 1000 shower change table, fixed height
Item number	R8406000

Installation in different wall types

	Concrete >B25 V8611 - Mounting kit, 9 hex screws Ø10 x 70 - plugs SX12. To be ordered separately. 
	Solid Brick >= Mz12 V8611 - Mounting kit, 9 hex screws Ø10 x 70 - plugs SX12. To be ordered separately. 
	Solid Sand Lime Brick >= Hlz12 V8611 - Mounting kit, 9 hex screws Ø10 x 70 - plugs SX12. To be ordered separately. 
	Aerated Concrete P4 V8661 - Mounting kit, 8 bolts M5 x 50 - plugs FTP K 6. To be ordered separately. 
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with wood V8611 - Mounting kit, 8 screws Ø5 x 50 - plugs SX8. NB! Plugs are not needed. To be ordered separately. 



Product Item number	SCT 1000 shower change table, fixed height R8406000		
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with 22 mm plywood Wall fasteners (9 pcs) must be bought separately, for drywall it is possible to use e.g. fischer KD8 toggles or similar.		
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with steel plates (2 mm) Wall fasteners (9 pcs) must be bought separately, for drywall it is possible to use e.g. fischer KD8 toggles or similar.		
	Drywall (2 x 12,5 mm) water-resistant Mounting in this wall type is not recommended - risk of fatal injury to persons and walls.		

It is the responsibility of the installer to ensure that suitable wall fasteners are used.