




PRESSALIT®

Product	MATRIX SMALL wash basin without overflow
Item number	R2021000
Colour	VVS:636857000 NRF:6132502 RSK:7503000 EAN:5708590325071 HMI: 82611 NBS:N13:30,335 White
Product description	MATRIX is a series of wash basins, most of them are designed by Pressalit. MATRIX SMALL and CURVE wash basins fit onto PLUS, SELECT and VALUE wash basin brackets, whereas MATRIX MEDIUM, ANGLE, ANGLE DEEP and SQUARE are tailor made to fit specific brackets. MATRIX SMALL wash basin, 600 x 490 x 130 mm, with two integrated handrails in the front, tap hole Ø36 mm, without overflow. Supplied with drain fitting. The wash basin has raised edges, preventing water from running over the back or down the outer sides. Materials: Cultured marble with a high-polished, pore-free sanitary gel coating. Suitable for wash basin brackets from the Pressalit PLUS and SELECT ranges.
Product capacity	200 kg.
Materials	Cultured marble with a high-polished, pore-free sanitary gel coating.
Warranty	Pressalit makes a commitment to remedy material and manufacturing defects for a period of five years from the invoicing date.



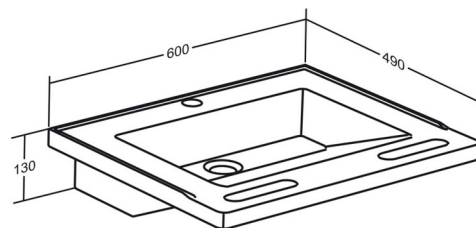

PRESSALIT®

Product	MATRIX SMALL wash basin without overflow
Item number	R2021000
Cleaning	Wash basin For cleaning the wash basin, use hot water and a mild soapy cleaning agent. Make sure that the product is wiped down with a soft rag wrung out in clear water immediately after cleaning. For disinfecting the wash basin, the following agents can be used: Sodium hydroxide 5% Acetic acid solution 10% Ethanol solution 70% Sodium hypochlorite 5%, active chlorine Sodium chloride 170g/l, diluted to 50%. Make sure that the product is wiped down with a soft rag wrung out in clear water immediately after disinfection. NB! Do not use abrasive cleaning agents, as this will cause damage to the surface of the wash basin.
Declaration of conformity	Declaration of Performance Compliance criteria according to EN 14688:2015. 4.1 Load resistance: stable, without cracks or deformations. 4.2 Draining of water: Water drained away completely. 4.3 Resistance to temperature changes: Without cracks, delaminations. 4.4 Resistance to chemicals and staining agents: - Sodium hydroxide 5% - without staining or deterioration; - Acetic acid solution 10% - without staining or deterioration; - Ethanol sol. 70% - without staining or deterioration; - Sodium hypochlorite 5% active chlorine - without staining or deterioration; - Sodium chloride 170g/l diluted to 50% - without staining or deterioration. 4.5 Surface stability / resistance to scratching: Do not use abrasives on the surface. 4.6 Cleanability: Smooth, non-absorbant surfaces. 4.7 Protection against overflowing: CL 00. 4.8 Durability: Product is considered durable.





Product	MATRIX SMALL wash basin without overflow
Item number	R2021000

Installation in different wall types

	Concrete >B25 V8602 - Mounting kit, 2 coach screws Ø10 x 100 - plugs SX12. To be ordered separately	
	Solid Brick >= Mz12 V8602 - Mounting kit, 2 coach screws Ø10 x 100 - plugs SX12. To be ordered separately	
	Solid Sand Lime Brick >= Hlz12 V8602 - Mounting kit, 2 coach screws Ø10 x 100 - plugs SX12. To be ordered separately	
	Aerated Concrete P4 V8652 - Mounting kit, 2 coach screws Ø10 x 100 - plugs GB14. To be ordered separately.	
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with wood V8602 - Mounting kit, 2 countersunk screws Ø10 x 80, plugs SX12. NB! Plugs are not needed. To be ordered separately.	



Product Item number	MATRIX SMALL wash basin without overflow R2021000	
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with 22 mm plywood Mounting in this wall type is not recommended - risk of fatal injury to persons and walls.	
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with steel plates (2 mm) Mounting in this wall type is not recommended - risk of fatal injury to persons and walls.	
	Drywall (2 x 12,5 mm) water-resistant Mounting in this wall type is not recommended - risk of fatal injury to persons and walls.	

It is the responsibility of the installer to ensure that suitable wall fasteners are used.