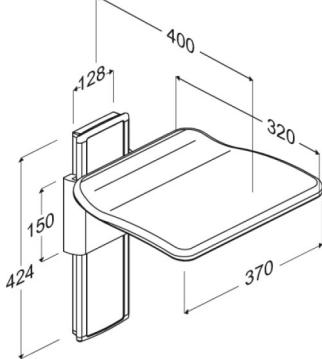




<b>Product</b>	PLUS folding seat, manually height adjustable
<b>Item number</b>	R5520112000
	VVS:777531200 NRF:7501003 RSK:7973927 EAN:5708590306360 HMI: 130158 NBS:N13:448 FDA: INN/D135865
<b>Colour</b>	White
	
<b>Product description</b>	<p>PLUS folding seat. Manually height adjustable by 240 mm. Anthracite cover plate for vertical wall track. The seat is foldable. Excl. mounting kit.</p> <p>The folding seat is not suitable for use in the shower area.</p> <p>PLUS folding seat. Manually height adjustable by 240 mm. Anthracite cover plate for vertical wall track.</p> <p>Materials: Aluminium, thermoset plastic, plastic.</p> <p>Excl. mounting kit.</p>
<b>Adjustability</b>	Height adjustable
<b>Adjustment height</b>	240 mm
<b>Product capacity</b>	<p>Maximum user mass: 265 kg.</p> <p>When the seat is loaded with 265 kg, each wall fastener is loaded with 23 kg.</p> <p><i>The seat has been tested statically with safety factor 1.5, which is a requirement according to the applied assistive products standards.</i></p>
<b>Materials</b>	The folding seat is made out of thermoset plastic, and the mounting and suspension bracket are made from 10 my anodised aluminium. The end caps are made from ABS plastic.
<b>Ergonomics</b>	Ergonomically shaped seat, which offers good and comfortable support. The seat is suitable for situations where additional seating is required and space is limited, - e.g. in kitchens, lifts and corridors or on the landings.
<b>Features</b>	The seat can be folded away when not in use, - or to free up space. Stays up of itself when folded away.












<b>Product</b>	PLUS folding seat, manually height adjustable
<b>Item number</b>	R5520112000
<b>Warranty</b>	Pressalit makes a commitment to remedy material and manufacturing defects for a period of five years from the invoicing date.
<b>Cleaning</b>	<p>PLUS Folding seat</p> <p>The product is to be cleaned with hot water or a mild soapy cleaning agent. Do not use chlorine based, corrosive or abrasive cleaners as it may result in the surface being damaged.</p> <p>The following cleaning agents have been tested by Pressalit and may be used, as long as they are diluted according to the instructions on the container.</p> <p><b>DISINFECTANTS:</b></p> <p>Clinimax Difficil-S Erisan OXY+ Sprit (husholdningssprit) Suma Bac D10 Virkon Rodalon Desinfektionsspray Lysoformin Spezial CaviCide Sufanios Premium Tvättsprit 70%</p> <p><b>NON-DISINFECTANTS:</b></p> <p>Suma Star free D1 Taski 100 Taski 200 Milizid Citro</p> <p>The product must be wiped down with a soft rag wrung out in clear water immediately after cleaning, as some materials may otherwise be discolored and stained, and the surface coating may deteriorate.</p> <p><b>DECALCIFICATION OF ALUMINUM PARTS:</b></p> <p>Pressalit recommends that chalky deposits be removed from wall tracks and other aluminum parts using a solution of three parts 30% acetic acid to seven parts tap water. When the aluminum parts have been washed down with this solution, the parts must be wiped over with a damp cloth wrung out in clear water.</p>



<b>Product</b>	PLUS folding seat, manually height adjustable
<b>Item number</b>	R5520112000

## Installation in different wall types

	<b>Concrete &gt;B25</b> V8610 - Mounting kit, 8 coach screws Ø8 x 70, plugs SX10. To be ordered separately. 
	<b>Solid Brick &gt;= Mz12</b> V8610 - Mounting kit, 8 coach screws Ø8 x 70, plugs SX10. To be ordered separately. 
	<b>Solid Sand Lime Brick &gt;= Hz12</b> V8610 - Mounting kit, 8 coach screws Ø8 x 70, plugs SX10. To be ordered separately. 
	<b>Aerated Concrete P4</b> V8660 - Mounting kit, 8 countersunk bolts M8 x 35, plugs FTP M 8. To be ordered separately. 
	<b>Drywall (2 x 12,5 mm) water-resistant, re-enforced with wood</b> V8610 - Mounting kit, 8 coach screws Ø8 x 70, plugs SX10. NB! Plugs are not needed. To be ordered separately. 



# PRESSALIT®

Product	PLUS folding seat, manually height adjustable
Item number	R5520112000
	<p><b>Drywall (2 x 12,5 mm) water-resistant, re-enforced with 22 mm plywood</b></p> <p>Wall fasteners (8 pcs) must be bought separately, for drywall it is possible to use e.g. fischer KD8 toggles or similar.</p>
	<p><b>Drywall (2 x 12,5 mm) water-resistant, re-enforced with steel plates (2 mm)</b></p> <p>Wall fasteners (8 pcs) must be bought separately, for drywall it is possible to use e.g. fischer KD8 toggles or similar.</p>
	<p><b>Drywall (2 x 12,5 mm) water-resistant</b></p> <p>Wall fasteners (8 pcs) must be bought separately, for drywall it is possible to use e.g. fischer KD8 toggles or similar.</p>

[pressalit.com](http://pressalit.com)