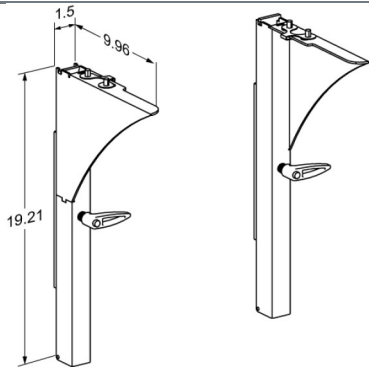




PRESSALIT®

<b>Product</b> <b>Item number</b>	MATRIX brackets for sink, 200 mm height adjustable R2015182
<b>Color</b>	VVS:636858810 NRF:6132552 EAN:5708590329345 HMI: 106240 NBS:N13:30,335 FDA:ILW/D142473 Pale gray
<b>Product description</b>	 <p>MATRIX brackets are the low cost solution for MATRIX MEDIUM and ANGLE sinks. They are available in a manually height adjustable version, which is suitable for infrequent adjustment.</p> <p>Sink brackets, set of 2 pcs. 200 mm height adjustable (Not for frequent adjustment). Suitable for MEDIUM and ANGLE sinks with integrated handrails.          Recommendation: Flexible feed and waste system R2087/R2085.          Excl. mounting kit.</p>
<b>Adjustability</b> <b>Adjustment height</b> <b>Product capacity</b>	Height adjustable 7,88 inch Maximum user weight (MUM): 353 lbs. Maximum load (SWL): 331 lbs. Suitable for sinks weighing no more than 66 lbs. When the sink is loaded with 331 lbs, each wall fastener will be carrying 165 lbs. <i>Sink brackets need to be able to carry the weight of the sink, as well as support the weight of the person who is leaning against the sink or who is using the sink to rise from seated position.</i> <b>Neither sink nor sink bracket are intended to carry the full body weight of a person, and the test methods applicable to sink brackets reflect this: ISO 17966 prescribes a static test on the front edge of the sink at 75% of maximum user weight, i.e. when the maximum load on a sink bracket is given as 331 lbs and the wash basin weighs 66 lbs, it is – according to ISO 17966 – the equivalent of a user weighing 353 lbs leaning on the front edge of the wash basin.</b>
<b>Materials</b>	Powder coated stainless steel



# PRESSALIT®











<b>Product</b>	MATRIX brackets for sink, 200 mm height adjustable
<b>Item number</b>	R2015182
<b>Warranty</b>	Pressalit makes a commitment to remedy material and manufacturing defects for a period of five years from the invoicing date.
<b>Cleaning</b>	<p>This product should be cleaned with hot water or a mild cleaning solution. Do not use corrosive or abrasive cleaners as it may result in the surface being damaged.</p> <p>For surface disinfection, chlorine-based disinfectants may be used according to the product specification and safety precautions for these products.</p> <p>The following cleaning agents have been tested by Pressalit and may be used, as long as they are diluted according to the instructions on the container.</p> <p><b>DISINFECTANTS:</b> Clinimax Difficil-S Erisan OXY+ Sprit (husholdningssprit) Suma Bac D10 Virkon Rodalon Desinfektionsspray Lysoformin Spezial CaviCide Sufanios Premium Tvättsprit 70%</p> <p><b>NON-DISINFECTANTS:</b> Suma Star free D1 Taski 100 Taski 200 Milizid Citro</p> <p>The product must be wiped down with a soft rag wrung out in clear water immediately after cleaning, as some materials may otherwise be discolored and stained, and the surface coating may deteriorate.</p>









PRESSALIT®

<b>Product</b>	MATRIX brackets for sink, 200 mm height adjustable
<b>Item number</b>	R2015182

## Mounting in different wall types

	<b>Concrete &gt;B25</b> V8601 - Mounting kit, 8 lag bolts Ø6 x 70 - plugs SX8. To be ordered separately.	
	<b>Solid Brick &gt;= Mz12</b> V8601 - Mounting kit, 8 lag bolts Ø6 x 70 - plugs SX8. To be ordered separately.	
	<b>Solid Sand Lime Brick &gt;= Hlz12</b> V8601 - Mounting kit, 8 lag bolts Ø6 x 70 - plugs SX8. To be ordered separately.	
	<b>Aerated Concrete P4</b> It is not recommended to install this product in aerated concrete.	
	<b>Drywall (2 x 12,5 mm) water-resistant, re-enforced with wood</b> V8601 - Mounting kit, 8 lag bolts Ø6 x 70 - plugs SX8. NB! Plugs are not needed. To be ordered separately.	



<b>Product</b> <b>Item number</b>	MATRIX brackets for sink, 200 mm height adjustable R2015182	
	<b>Drywall (2 x 12,5 mm) water-resistant, re-enforced with 22 mm plywood</b> Mounting in this wall type is not recommended - risk of fatal injury to persons and walls.	
	<b>Drywall (2 x 12,5 mm) water-resistant, re-enforced with steel plates (.08 inch)</b> Mounting in this wall type is not recommended - risk of fatal injury to persons and walls.	
	<b>Drywall (2 x 12,5 mm) water-resistant</b> Mounting in this wall type is not recommended - risk of fatal injury to persons and walls.	

It is the responsibility of the installer to ensure that suitable wall fasteners are used.