

PRESSALIT.

T9807

Toilet seat Ergosit without cover With stabilising buffers and extra strong cross-bar hinge (D92).

Item number R29000-D92999

VVS:615692000 NRF:6190543

EAN:5708590315935


HMI: 1845 NBS:N13:300

Toilet seat, Ergosit, with stabilising buffers, without cover, incl. extra strong cross bar hinge with 100 mm bolt.

Colour White

DescriptionToilet seat, Ergosit, with stabilising buffers, without cover, incl. extra strong cross bar hinge with 100 mm

bolt.

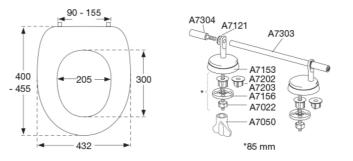

Materials Seat: Thermoset plastic (urea)

Strap: Stainless steel V2A

Product capacity

This product has been tested statically up to 375 kg. As the European standard for technical aids for disabled, BS/EN 12182:2012, requires a static test with safety factor

1.5, the nominal maximum load for this product is therefore 250 kg.

Weight 2,357 kg

Gross weight 2,664 kg

Weight per crate 2,664 kg

Qty per crate 1

Crates per pallet 76

Qty per pallet 76



PRESSALIT.

Toilet seat Ergosit without cover With stabilising buffers and extra strong cross-bar hinge (D92).

Cleaning

Use a mild soap solution to clean the toilet seat. Please take care that the seat and hinges are not left damp. For disinfecting the seat, e.g. ethanol 85% can be used. Make sure that the product is wiped down with a soft rag wrung out in clear water and dried off with a soft, dry cloth immediately after disinfection.

| Avoid contact of the seat and hinges with abrasive, corrosive or chlorine-based cleaners, as these may cause damage or lead to flash rust. Therefore, when cleaning the bowl, make sure that the seat and cover are kept in an upright position until all cleaning agent has been flushed away.

Warranty

Your Pressalit toilet seat is subject to a 10-year product warranty against presentation of receipt. You should contact the dealer or store where you purchased the seat in the event of a complaint.

| Strict | Stri

Subject to changes in the product range, technical changes and printing errors.

pressalit.com

Pressalit A/S Pressalitvej 1 DK-8680 Ry Tel.: +45 8788 8788 Fax: +45 8788 8789 E-mail: pressalit@pressalit.com