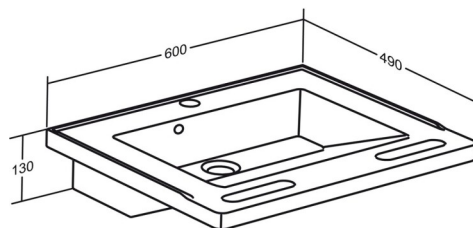




PRESSALIT®

Product	MATRIX SMALL wash basin with overflow
Item number	R2020000
Colour	<p>VVS:636857100 NRF:6132501 RSK:7502999 EAN:5708590325064 HMI: 82610 NBS:N13:30,335</p> <p>White</p>
Product description	<p>MATRIX is a series of wash basins, most of them are designed by Pressalit. MATRIX SMALL and CURVE wash basins fit onto PLUS, SELECT and VALUE wash basin brackets, whereas MATRIX MEDIUM, ANGLE, ANGLE DEEP and SQUARE are tailor made to fit specific brackets.</p> <p>MATRIX SMALL wash basin, 600 x 490 x 130 mm, with two integrated handrails in the front, tap hole Ø36 mm, with overflow. Supplied with drain fitting. The wash basin has raised edges, preventing water from running over the back or down the outer sides. Materials: Cultured marble with a high-polished, pore-free sanitary gel coating. Suitable for wash basin brackets from the Pressalit PLUS and SELECT ranges.</p>
Product capacity	200 kg.
Materials	Cultured marble with a high-polished, pore-free sanitary gel coating.
Warranty	Pressalit makes a commitment to remedy material and manufacturing defects for a period of five years from the invoicing date.




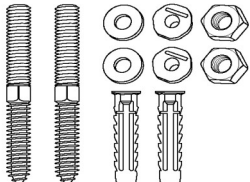

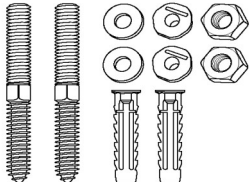

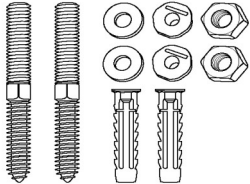

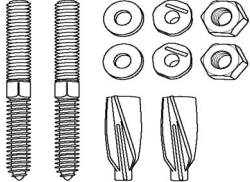

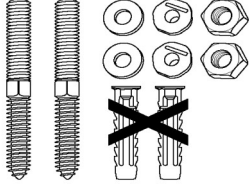


Product	MATRIX SMALL wash basin with overflow
Item number	R2020000
Cleaning	<p>For cleaning the wash basin, use hot water and a mild soapy cleaning agent. Make sure that the product is wiped down with a soft rag wrung out in clear water immediately after cleaning.</p> <p>For disinfecting the wash basin, the following agents can be used:</p> <p>Sodium hydroxide 5%</p> <p>Acetic acid solution 10%</p> <p>Ethanol solution 70%</p> <p>Sodium hypochlorite 5%, active chlorine</p> <p>Sodium chloride 170g/l, diluted to 50%.</p> <p>Make sure that the product is wiped down with a soft rag wrung out in clear water immediately after disinfection.</p> <p>NB! Do not use abrasive cleaning agents, as this will cause damage to the surface of the wash basin.</p>
Declaration of conformity	<p>Declaration of Performance</p> <p>Compliance criteria according to EN 14688:2015.</p> <p>4.1 Load resistance: stable, without cracks or deformations.</p> <p>4.2 Draining of water: Water drained away completely.</p> <p>4.3 Resistance to temperature changes: Without cracks, delaminations.</p> <p>4.4 Resistance to chemicals and staining agents:</p> <ul style="list-style-type: none">- Sodium hydroxide 5% - without staining or deterioration;- Acetic acid solution 10% - without staining or deterioration;- Ethanol sol. 70% - without staining or deterioration;- Sodium hypochlorite 5% active chlorine - without staining or deterioration;- Sodium chloride 170g/l diluted to 50% - without staining or deterioration. <p>4.5 Surface stability / resistance to scratching: Do not use abrasives on the surface.</p> <p>4.6 Cleanability: Smooth, non-absorbant surfaces.</p> <p>4.7 Protection against overflowing: CL 10.</p> <p>4.8 Durability: Product is considered durable.</p>









Product	MATRIX SMALL wash basin with overflow
Item number	R2020000

Installation in different wall types

	<p>Concrete >B25</p> <p>V8602 - Mounting kit, 2 coach screws Ø10 x 100 - plugs SX12. To be ordered separately</p>	
	<p>Solid Brick >= Mz12</p> <p>V8602 - Mounting kit, 2 coach screws Ø10 x 100 - plugs SX12. To be ordered separately</p>	
	<p>Solid Sand Lime Brick >= Hlz12</p> <p>V8602 - Mounting kit, 2 coach screws Ø10 x 100 - plugs SX12. To be ordered separately</p>	
	<p>Aerated Concrete P4</p> <p>V8652 - Mounting kit, 2 coach screws Ø10 x 100 - plugs GB14. To be ordered separately.</p>	
	<p>Drywall (2 x 12,5 mm) water-resistant, re-enforced with wood</p> <p>V8602 - Mounting kit, 2 countersunk screws Ø10 x 80, plugs SX12. NB! Plugs are not needed. To be ordered separately.</p>	



Product Item number	MATRIX SMALL wash basin with overflow R2020000	
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with 22 mm plywood Mounting in this wall type is not recommended - risk of fatal injury to persons and walls.	
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with steel plates (2 mm) Mounting in this wall type is not recommended - risk of fatal injury to persons and walls.	
	Drywall (2 x 12,5 mm) water-resistant Mounting in this wall type is not recommended - risk of fatal injury to persons and walls.	

It is the responsibility of the installer to ensure that suitable wall fasteners are used.