




# PRESSALIT®

<b>Product</b> <b>Item number</b>	Lift for wall cupboard, electrically height adjustable RK1020-92
<b>Product description</b>	<p>EAN:5708590334622</p>  <p>The name INDIVO relates to the individual configuration of the products.</p> <p>Lift for wall cupboards, with 1 motor, height adjustable down/out, with switches.  Lengths up to 1200 mm.  Height adjustable 430 mm.  Incl. mounting kit for brick wall  Please state desired length when ordering</p>
<b>Adjustability</b> <b>Adjustment height</b> <b>Product capacity</b> <b>Speed upwards</b> <b>Noise level</b>	<p>Height adjustable</p> <p>430 mm</p> <p>Max. load (including cupboards):  1 lift: 110 kg</p> <p>Speed up mm: 18 mm/s  Speed down mm: 18 mm/s</p> <p>48 dB</p>
<b>Materials</b>  <b>Ergonomy</b>	<p>Material:  Lift motor: Steel  Cross braces: Aluminium  Switches: ABS plastic</p> <p>Wall cupboards are moved diagonally, that is both vertically and towards the user. This makes it easy for seated users and children to see and access covered contents.  Height-adjustable wall cupboards provide extra storage options in kitchens where cupboards cannot be installed under worktops out of consideration for seated users.</p>

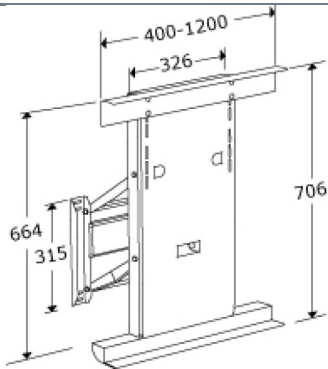

<b>Product</b>	Lift for wall cupboard, electrically height adjustable
<b>Item number</b>	RK1020-92
<b>Features</b>	<p>Lift heights for wall cupboards are adjusted via switches in the front worktop edge. Operating switches can be placed wherever you want along the front edge. The switches are colour-coded - aluminium to operate worktops, and red to operate wall cupboards.</p> <p>The design of the lifts ensures that the lift motors are as discreet as possible, regardless of the cupboard position.</p> <p>When the wall cupboards are lowered 430 mm to their lowest position, they are also extended 180 mm towards the user.</p>
<b>Actuator (motor)</b>	LA31 Deskline (Linak), 1500N, IPX1
<b>Control box</b>	CBD6 (Linak)
<b>Wired remote control</b>	HB53 (Linak), IPX1
<b>Power consumption (maximum load)</b>	<p>Power consumption by maximum load, watt: 187 W</p> <p>Power consumption by standby: 1,5 W</p>
<b>Warranty</b>	Pressalit makes a commitment to remedy material and manufacturing defects for a period of three years from the invoicing date.



<b>Product</b>	Lift for wall cupboard, electrically height adjustable
<b>Item number</b>	RK1020-92
<b>Cleaning</b>	<p>INDIVO lift for kitchenwall cupboard.</p> <p>The product is to be cleaned with hot water or a mild soapy cleaning agent. Do not use chlorine based, corrosive or abrasive cleaners as it may result in the surface being damaged.</p> <p>The following cleaning agents have been tested by Pressalit and may be used, as long as they are diluted according to the instructions on the container.</p> <p><b>DISINFECTANTS:</b></p> <p>Clinimax Difficil-S Erisan OXY+ Sprit (husholdningssprit) Suma Bac D10 Virkon Rodalon Desinfektionsspray Lysoformin Spezial CaviCide Sufanios Premium Tvättsprit 70%</p> <p><b>NON-DISINFECTANTS:</b></p> <p>Suma Star free D1 Taski 100 Taski 200 Milizid Citro</p> <p>The product must be wiped down with a soft rag wrung out in clear water immediately after cleaning, as some materials may otherwise be discolored and stained, and the surface coating may deteriorate.</p> <p><b>DECALCIFICATION OF ALUMINUM PARTS:</b></p> <p>Pressalit recommends that chalky deposits be removed from wall tracks and other aluminum parts using a solution of three parts 30% acetic acid to seven parts tap water. When the aluminum parts have been washed down with this solution, the parts must be wiped over with a damp cloth wrung out in clear water.</p>



# PRESSALIT®

<b>Product</b>	Lift for wall cupboard, electrically height adjustable
<b>Item number</b>	RK1020-92

---

[pressalit.com](http://pressalit.com)

---

Pressalit A/S  
Pressalitvej 1  
DK-8680 Ry  
Tel.: +45 8788 8788  
Fax: +45 8788 8789  
E-mail: [pressalit@pressalit.com](mailto:pressalit@pressalit.com)

# PRESSALIT®